



WRAP AROUNDS DV-1



DV-1C



Description

Dromex® Wrap Arouds, polycarbonate spectacles is designed to protect the users eyes from flying debris during work activities. Suitable in the construction, mining, milling, engineering workshops, factories, warehouse and general industries without compromising worker safety and vision.

Designed for compatibility with other PPE, such as industrial hats, hearing protectors and respiratory protective half mask devices. The spectacle is lightweight, with an impact resistant anti-scratch polycarbonate lens. Can be used as, overspecs with prescription glasses.

These features ensures a firm fit promoting enhanced product performance and user comfort.

Special Instructions

Failure to adhere to all instructions and precautionary measures can result in injury. If the user has eye conditions or vision impairment, they must consult with a registered physician prior to use. Any damages to this protective device, as well as fogging may reduce clarity of sight that could result in injury. Following any major detectible defects on the spectacle, the spectacle should be disposed of. This eye protector is not intended for furnace or welding use. This eye protector is suitable for use to the lowest marking on the lens (ocular) and frame. If the lens becomes scratched or damaged the eye protector should be replaced.

Compliance & Conformity

Complies with CE, EN 166:2001.


Quality System as per ISO9001:2008.

Specifications

Style:	Non-metal, clipless over specs with polycarbonate vented temples.
Lens:	Polycarbonate anti-scratch.
Frame:	Polycarbonate frame and temples.
Refractive Power:	±0.06 D.
Astigmatism:	0.06 D.
Optical class:	1 - ± 0,06 DIOPTRES for permanent wear.
Lateral vision:	120 degrees.
Minimum Velocity particles:	Class F, 45 m/s.
Mass:	40g.
Additional:	Can fit over prescription eyewear. Available also in anti-glare lens (green colour and amber colour lens).

Packaging, Storage & Obsolescence

Packed 12 individually wrapped spectacles in a box and 25 boxes per carton (300 spectacles per carton). Store in a cool dry place.



Other Model Spectacles



DV-1GN
⇒



DV-1A
⇒

Inspection Frequency and Details

Prior to use the spectacles should be free of any potential contaminants that can affect its intended performance. This spectacle should be inspected by the user at the end of every use and then again prior to each use. Cracked eyewear must be removed from service as they will reduce eye protection and obstruct vision.

Cleaning & Maintenance

Designed as re-usable protective eyewear. After use clean with a mild cleaning liquid, carefully rinse off all traces of the cleaning liquid and dry with a soft cloth and gently wipe with a soft spectacle cleaning material. Do not clean on clothing nor use abrasive cleaners.

Limitations of Use

These spectacles should not be used for any athletic game, recreational activities, paintball or simulated water activities. These spectacles are not suitable to protect from chemical, biological, radiological, and nuclear (CBRN) agents.

Recommendations and Restrictions

The use of this spectacle is restricted to the scope and application as intended by EN166:2001.


Shelf Life

The duration of the spectacle cannot be determined by a timeline as its intended for normal day to day use. Ensure proper care and maintenance (inspection and cleaning) is adhered to. Under normal circumstances the eye protector should offer adequate protection for 3 years.

Disposal

All industrial waste should be disposed of correctly according to local regulations and good disposal practice. Safety eyewear should be disposed of considering the hazardous substance they were used for or could be contaminated with. Please consider recycling.

Materials

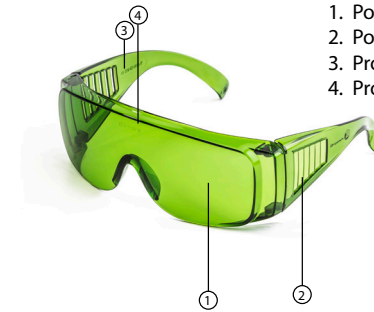

1. Polycarbonate mono-lens
2. Polycarbonate temples with ventilation
3. Product Marking - DV-EN166-F
4. Product Marking - 2-1.2 DV 1F